




## TECHNICAL PRODUCT SPECIFICATION

|             |             |          |                                                  |                       |
|-------------|-------------|----------|--------------------------------------------------|-----------------------|
| Revision No |             |          | Customer                                         | General Specification |
| Issue Date: | 17-Aug-2026 |          | Description                                      |                       |
| Part Number | VLS         | VLS48S12 | 3/16" DURABUBBLE LITE 4' X 750' SLIT 12" PERF 8" |                       |

### PHYSICAL PROPERTIES:

| PROPERTY                  | RESULT           | U o M    |
|---------------------------|------------------|----------|
| Bubble Type               | 3/16             | inches   |
| MATERIAL TYPE             | LLDPE/LDPE blend | N/A      |
| DEFLATION                 | < 5              | %        |
| MINIMUM USAGE TEMPERATURE | -50 (°C)         | -58 (°F) |
| MAXIMUM USAGE TEMPERATURE | 80 (°C)          | 176 (°F) |
| MELTING POINT             | 137 (°C)         | 275 (°F) |

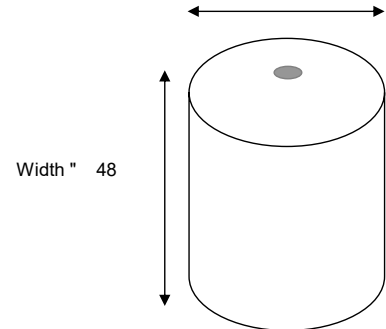

### FINISHED PRODUCT SPECIFICATIONS:

| PROPERTIES                  | Min   | Target | Max   |
|-----------------------------|-------|--------|-------|
| Total Roll Width (inch)     | 48    | 48.25  | 48.5  |
| Roll Length (feet)          | 750   | 755    | 760   |
| Diameter (inch) (ref. Only) | 37.88 | 38.11  | 38.23 |
| Weight (lbs) ( with Core)   | 30.34 | 34.06  | 37.85 |
| Slit @ (inch)               | 11.75 | 12     | 12.25 |

### PACKAGING

|          |   |           |       |   |
|----------|---|-----------|-------|---|
| Quantity | 1 | Roll /Bag | Slits | 4 |
|----------|---|-----------|-------|---|

Durabubble is made from a blend of low density polyethylene and linear low density polyethylene. Store drop off recyclable. May not be recyclable in your area. Bundle Diameter is for reference only. It may change depending upon the storage conditions, slow diffusion of air, staking and in transit.



The technical information, suggested uses and applications presented are made without charge and are believed to be reliable; however, POLYAIR disclaims responsibility for results of use of this information. POLYAIR makes no warranties, either express or implied, concerning our materials, including any statements or suggestions as being inducements. All users should rely on their own test in determining suitability.

This product data sheet is effective from 17-Aug-2026 and supersedes all previously published data.

Corporate Headquarter:

IPG - POLYAIR

Quality Assurance Department

330 HUMBERLINE DRIVE, TORONTO, ON M9W 1R5

TEL: 416-679-6600; FAX: 416-679-6610