


PRODUCT: Ecolite (Golden Colour Kraft Bubble Mailers)

PROPERTY	Nominal Value	UOM
Bubble Size(or type)	7/64	inches
Co- extruded Paper Thickness	4.00	mil+/- 10%
Seam Seal Strength(ASTM F88)	4.60	lb/in.
Minimum Usage Temperature	-50 or -58	°C or °F
Maximum Usage Temperature	80 or 176	°C or °F
Recyclability(Bubble layers)	# 4 - LDPE	
Recycled Content(In Poly Layers)	0 - 20	%
Recycled Content(In Paper Layer)	0 -100	%
Golden Kraft Paper Composition	47 # Gold Kraft with 5# LDPE poly	
Print Quality	no smudged ink or unclear/ missed print	
Cartons	29 ECT C Flute Kraft-Double Stack Safety Factor 10.53	

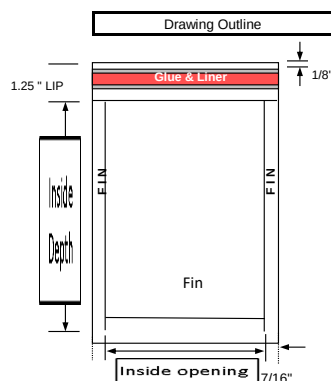

DIMENSIONAL TOLERANCES

Opening	Depth	Fin size	Liner Width	Liner Width	Lip Size	Quantity Per Case
as specified	as specified	7/16"	0.750"-1.000"	0.750"-1.000"	1.250"	as specified
± ¼"	± ¼"	± 1/8"	± 1/8"	± 1/8"	± 1/8"	-0, +2%

Target Dimensions and WEIGHTS (reference only)

Par No.	Inside Dimentions (In inch) ± 0.250"		Outside /Overall Dimentions (In inch) ± 0.250"		Mailer Piece Wt. 10%		QTY/ CS	Case Wt.(incl. Ctn) ± 10%		Carton Size(OD) l x w x h (inch)	Pallet Configuration Ctns/Layer	# Of Case /Skid
	Opening	Depth	Width	Depth	gram	(lbs)		gram	(lbs)			
ELSS000	4.250	7.375	5.125	9.0625	7.30	0.016	500	4128	9.10	27.75X15.8125X12.25	6X3	18
ELSS00	5.250	9.375	6.125	11.0625	10.90	0.024	250	3719	8.20	27.125 X 21.875 X 7.5	4X6	24
ELSS0	6.750	9.375	7.625	11.0625	13.50	0.030	250	4173	9.20	27 X 21.875 X 9.0	4X5	20
ELSS1	7.250	11.375	8.125	13.0625	17.20	0.038	100	2313	5.10	22.625X 13.625 X 9.5	7X5	35
ELSS2	8.500	11.375	9.375	13.0625	19.90	0.044	100	2585	5.70	22.375X13.125X11	7X4	28
ELSS3	8.500	13.875	9.375	15.5625	24.00	0.053	100	3130	6.90	22.375X16.125X11	6X4	24
ELSS4	9.500	13.875	10.375	15.5625	26.50	0.058	100	3402	7.50	22.375X15.875X11.750	6X4	24
ELSS5	10.500	15.375	11.375	17.0625	32.00	0.071	100	3946	8.70	23.750 X 17.625 X 12.5	6X3	18
ELSS6	12.500	18.375	13.375	20.0625	44.60	0.098	50	2858	6.30	20.375X12.625X14.75	8X3	24
ELSS7	14.250	19.375	15.125	21.0625	53.10	0.117	50	3311	7.30	21.125X15.625X13.250	12X2	24

The technical information, suggested uses and applications presented are made without charge and are believed to be reliable; however, POLYAIR disclaims responsibility for results of use of this information.

POLYAIR makes no warranties, either express or implied, concerning our materials, including any statements or suggestions as being inducements. All users should rely on their own test in determining suitability.

This product data sheet is effective from Jan.13,2025 and supersedes all previously published data.

POLYAIR (Group Company of Intertape Polymer Group-IPG)

Quality Assurance

330 Humberline Drive, Toronto, ON M9W 1R5
Tel (416) 679 - 6600